VA700 VIDEO AMPLIFIER

The VA700 converts a single video input into seven separate video outputs. Each of the outputs are amplified to maintain signal quality. This allows for expansion of a single video source up to seven monitors.

INSTALLATION

1. Connect the video source RCA to the VIDEO IN RCA connector.
2. Connect the video monitors to any of the seven VIDEO OUT RCA connectors.
3. Power input:
   - (+)12 Volt - Connect the terminal to a (+)12 volt source that has power when the key is in the accessory and ignition position. Always fuse appropriately.
   - Ground - Connect to chassis ground.
4. Power output:
   - These are outputs for an additional VA700. DO NOT use this output to power monitors or source units. It is strictly for low-current applications.

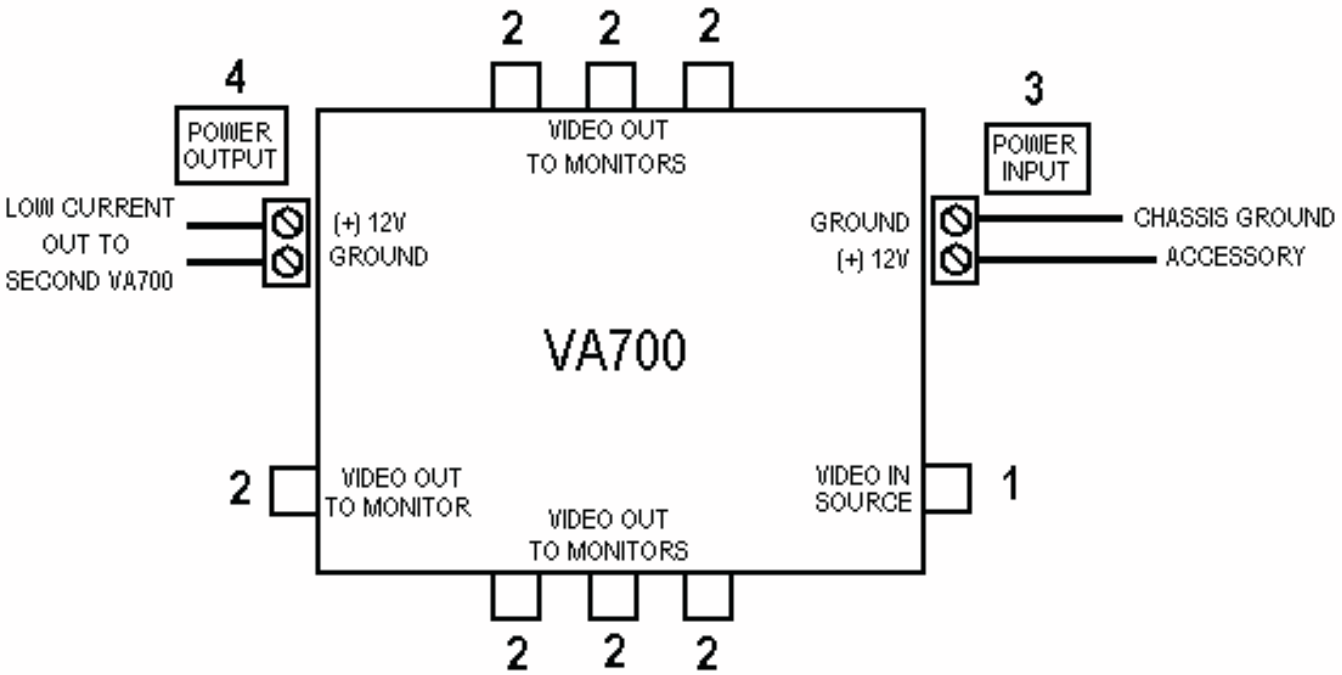

© 2001 Directed Electronics, Inc.